HXGF-G2A26

2 Way Power Divider

Technical Data Sheet

SN	Parameters	Specifications
1	Frequency Range	7~9GHz
2	Insertion Loss	≤0.5dB (Excluding theoretical loss 3.01 dB)
3	Input Port VSWR	≤ 1.30: 1
4	Output Port VSWR	≤ 1.25: 1
5	Isolation	≥20dB
6	Amplitude Balance	≤±0.3dB
7	Phase Balance	≤±3°
8	Power Handling	Forward ≤30W; Reversed ≤1W
9	Operating Temperature	-40℃~+70℃
10	Connectors	N-Female
11	Surface Finish	Black Paint

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.5mm)

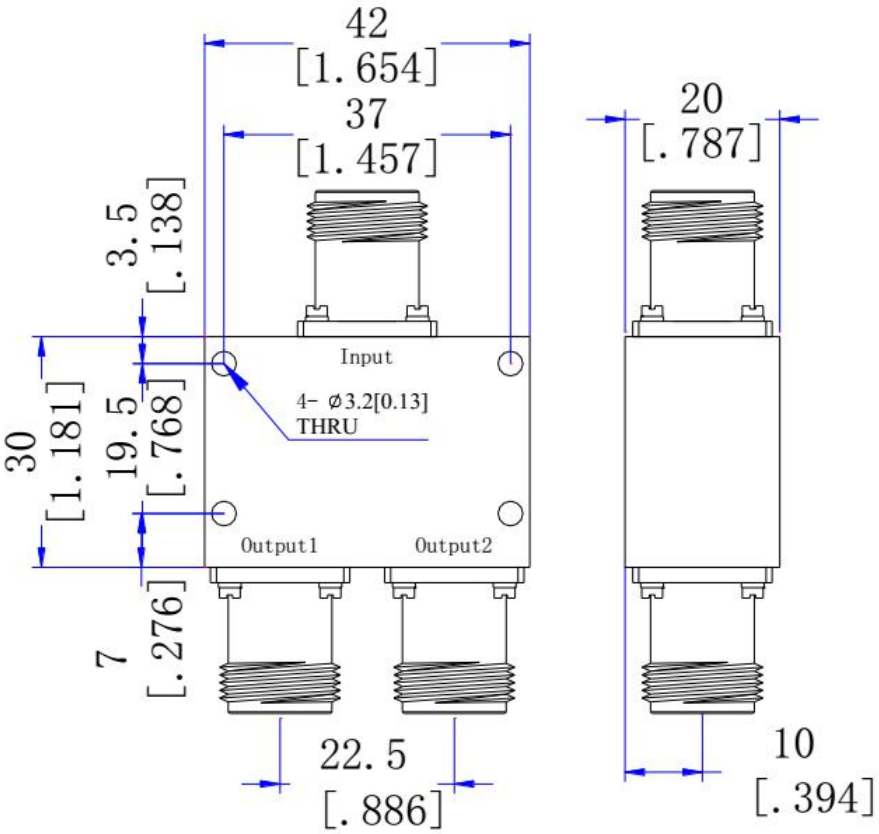

Tel:+86-029-85450833 FAX:+86-029-85450833 E-mail:sales_hxwb@163.com E-mail: sales@xahxmicrowave.com
http://www.xahxmicrowave.com http://www.hx-microwave.com Add:Yanta District, Xi'an, China