


HXLBQ-DTA765

Cavity Band Pass Filter

Technical Data Sheet

S/N	Item	Parameters	
1	Center Frequency(F0)	15000MHz	
2	Pass Band Bandwidth	±100MHz (14900 ~ 15100MHz) **	
3	Pass Band Insertion Loss	≤1.2dB	
4	Pass Band Ripple	≤0.35dB	
5	Pass Band Return Loss	≥23dB	
6	Stop Band Rejection	≥80dB @ DC ~ 14300MHz ≥50dB @ 14300 ~ 14500MHz	≥50dB @ 15500 ~ 15700MHz ≥80dB @ 15700 ~ 28000MHz ≥50dB @ 28000 ~ 30000MHz
7	Impedance	50 Ohms	
8	Power Handling	10W Max.	
9	Connectors	SMA-Female	
10	Surface Finish	Painted Black	
11	Temperature Range	-30°C ~ +70°C	
12	Material	Housing: H62 Copper alloy Cover: H62 Copper alloy Tuning screw: H62 Copper alloy	Connectors: Stainless Steel Other screw: Stainless Steel
13	Dimensions	80*16*8.5mm	
14	Net weight	0.075 KG	

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.3mm)

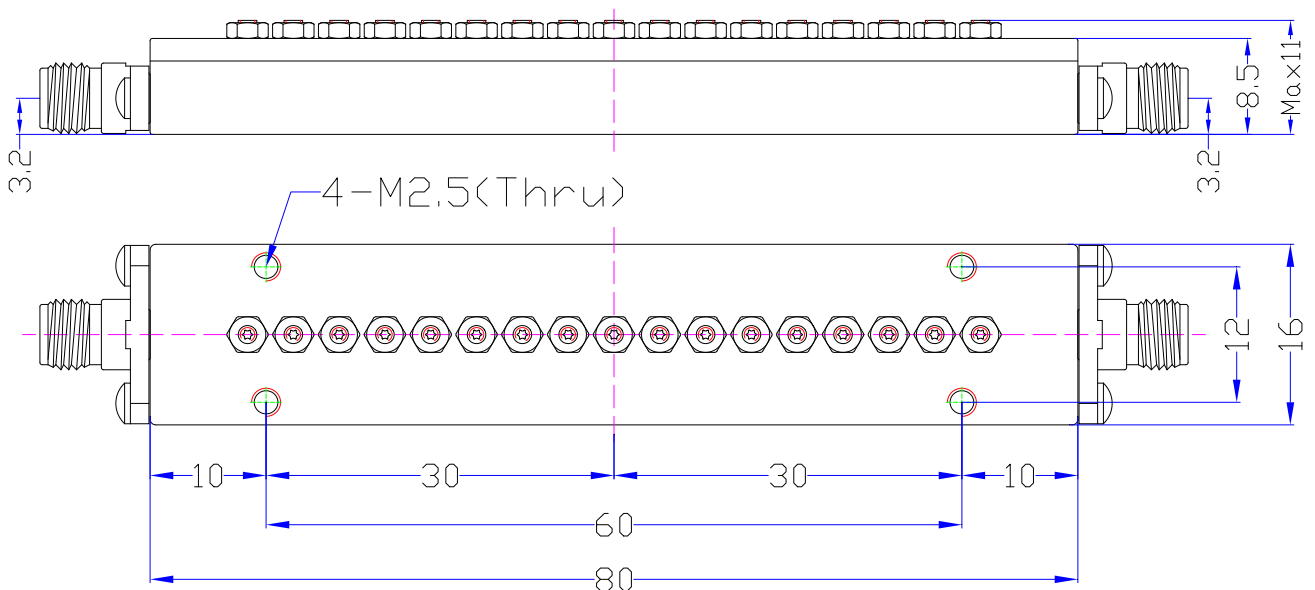

** The actual design bandwidth will be greater than the Pass Band Bandwidth, and there is no bandwidth limit.