


HXLBQ-DTA776LC

LC Band Pass Filter

Technical Data Sheet

S/N	Item	Parameters
1	Center Frequency(F0)	200MHz
2	Pass Band Frequency	170 ~ 230MHz **
3	Pass Band Insertion Loss	≤1.4dB
4	Pass Band Ripple	≤0.6dB
5	Pass Band VSWR	≤1.4:1
6	Stop Band Rejection	≥40dB @ DC ~ 130MHz ≥40dB @ 270 ~ 800MHz
7	Impedance	50 Ohms
8	Power Handling	1.0W Max.
9	Connectors	SMA-Male / SMA-Female
10	Surface Finish	Painted Black
11	Temperature Range	-30℃ ~ +70℃
12	Material	Housing: 6061 Aluminum alloy Connectors: Stainless Steel Cover: LY12 Aluminum alloy Other screw: Stainless Steel
13	Dimensions	40*18*13mm
14	Net weight	0.025 KG

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.3mm)

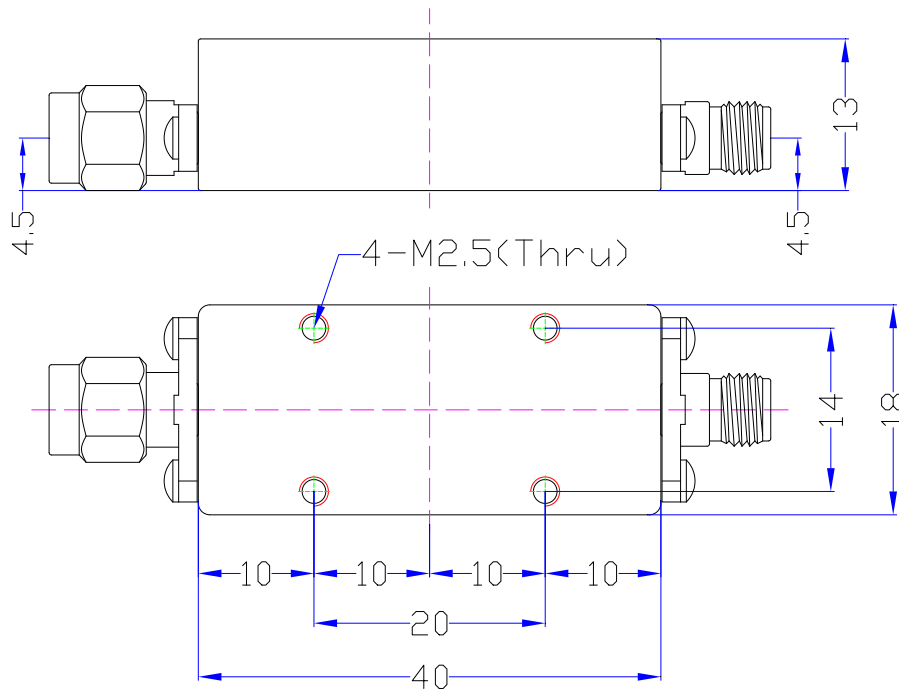

** The actual design bandwidth will be greater than the Pass Band Frequency, and there is no bandwidth limit.