●**Model：HXGF-G2A03**
●**Product Name：2 Way Power Divider**
●**Frequency：0.5~6.0GHz**

★Ultra Wide Frequency
★Small Size
★Customizable Design
★High Reliability

Technical Data Sheet	
Item	**Parameters**
• Way	2
• Frequency Range	0.5～6.0GHz
• Insertion Loss	≤1.0dB (Does not contain theory loss 3 dB)
• VSWR	IN: ≤1.4:1 OUT: ≤1.3:1
• Isolation	≥19dB
• Amplitude Balance	≤±0.3dB
• Phase Balance	≤±3°
• Power Handling	Forward ≤20Watt ; Reversed ≤2Watt
• Surface Finish	Gush Arenaceous Guide Oxygen
• Connectors	SMA-Female (Copper plating ternary alloy)
• Impedance	50 ohms
• Temperature Range	-40℃～+85℃
• Net Weight	0.04 KG
• Configuration	As Below (Size Unit: mm[inch])

●**Outline Drawing:** (Dimensions Unit: mm, Dimensions Tolerance: ±0.5mm)

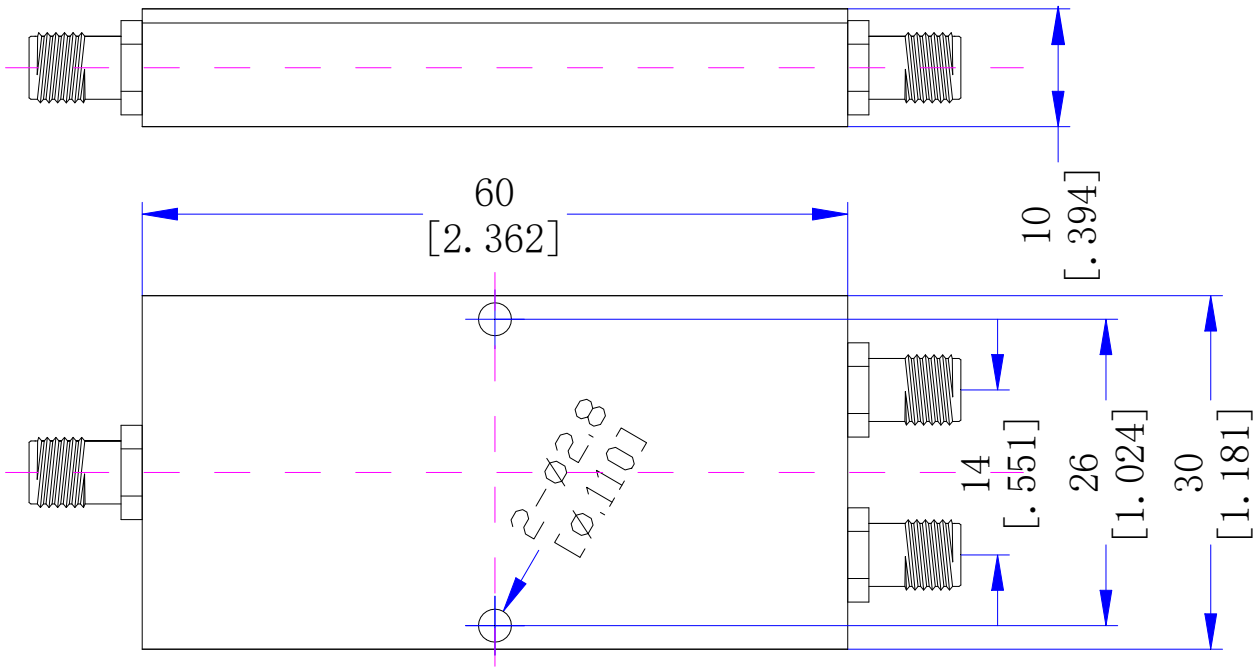

Tel:+86-029-85450833 FAX:+86-029-85450833 E-mail:sales_hxwb@163.com E-mail: sales@xahxmicrowave.com
http://www.xahxmicrowave.com http://www.hx-microwave.com Add:Yanta District, Xi'an, China